



Message Implementation Guideline

DSV IFTSTA D10B inbound

based on

IFTSTA

International multimodal status report message

UN D.10B S4

Version: v1.4
Issue date: 2022-04-07
Author: DSV A/S, EDI

2 Message Structure	2
3 Branching Diagram.....	7
4 Segments	11
5 Example.....	167



Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
0000	1	UNB	M	1	0	INTERCHANGE HEADER
0010	2	UNH	M	1	0	Message header
0020	3	BGM	M	1	0	Beginning of message
0030	4	DTM	C	9	1	Date/time/period
0040	5	TSR	R	1	0	Transport service requirements
0050		SG1	C	9	1	NAD-SG2
0060	6	NAD	M	1	1	Name and address
0070		SG2	C	9	2	CTA-COM-COM-COM
0080	7	CTA	M	1	2	Contact information
0090	8	COM	C	9	3	Communication contact
0090	9	COM	C	9	3	Communication contact
0090	10	COM	C	9	3	Communication contact
0050		SG1	C	9	1	NAD-SG2
0060	11	NAD	M	1	1	Name and address
0070		SG2	C	9	2	CTA-COM-COM-COM
0080	12	CTA	M	1	2	Contact information
0090	13	COM	C	9	3	Communication contact
0090	14	COM	C	9	3	Communication contact
0090	15	COM	C	9	3	Communication contact
0050		SG1	C	9	1	NAD-SG2
0060	16	NAD	M	1	1	Name and address
0070		SG2	C	9	2	CTA-COM-COM-COM
0080	17	CTA	M	1	2	Contact information
0090	18	COM	C	9	3	Communication contact
0090	19	COM	C	9	3	Communication contact
0090	20	COM	C	9	3	Communication contact
0050		SG1	C	9	1	NAD-SG2
0060	21	NAD	M	1	1	Name and address
0070		SG2	C	9	2	CTA-COM-COM-COM
0080	22	CTA	M	1	2	Contact information
0090	23	COM	C	9	3	Communication contact
0090	24	COM	C	9	3	Communication contact
0090	25	COM	C	9	3	Communication contact
0100		SG3	C	9	1	RFF-DTM
0110	26	RFF	M	1	1	Reference
0120	27	DTM	C	1	2	Date/time/period
0100		SG3	C	9	1	RFF
0110	28	RFF	M	1	1	Reference

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Content
0100		SG3	C	9	1	RFF
0110	29	RFF	M	1	1	Reference
0130	30	LOC	R	9	1	Place/location identification
0500		SG13	C	99999	1	CNI-SG14
0510	31	CNI	M	1	1	Consignment information
0540		SG14	M	99	2	STS-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-DTM-FTX-FTX-FTX-FTX-FTX-SG15-LOC-LOC-LOC-LOC-SG17-SG17-SG17-SG23
0550	32	STS	M	1	2	Status
0560	33	RFF	C	999	3	Reference
0560	34	RFF	C	999	3	Reference
0560	35	RFF	C	999	3	Reference
0560	36	RFF	C	999	3	Reference
0560	37	RFF	C	999	3	Reference
0560	38	RFF	C	999	3	Reference
0560	39	RFF	C	999	3	Reference
0560	40	RFF	C	999	3	Reference
0560	41	RFF	C	999	3	Reference
0560	42	RFF	C	999	3	Reference
0560	43	RFF	C	999	3	Reference
0560	44	RFF	C	999	3	Reference
0560	45	RFF	C	999	3	Reference
0560	46	RFF	C	999	3	Reference
0570	47	DTM	C	9	3	Date/time/period
0590	48	FTX	C	9	3	Free text
0590	49	FTX	C	9	3	Free text
0590	50	FTX	C	9	3	Free text
0590	51	FTX	C	9	3	Free text
0590	52	FTX	C	9	3	Free text
0600		SG15	C	9	3	NAD-SG16
0610	53	NAD	M	1	3	Name and address
0620		SG16	C	9	4	CTA-COM
0630	54	CTA	M	1	4	Contact information
0640	55	COM	C	9	5	Communication contact
0650	56	LOC	C	1	3	Place/location identification
0650	57	LOC	C	1	3	Place/location identification
0650	58	LOC	C	1	3	Place/location identification
0650	59	LOC	C	1	3	Place/location identification
0670		SG17	C	99	3	TDT
0680	60	TDT	M	1	3	Transport information
0670		SG17	C	99	3	TDT

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Content
0680	61	TDT	M	1	3	Transport information
0670		SG17	C	99	3	TDT
0680	62	TDT	M	1	3	Transport information
0910		SG23	C	99	3	GID-SG24-SG24-SG24-SG24-SG25-SG26-SG26
0920	63	GID	M	1	3	Goods item details
1000		SG24	C	99	4	MEA
1010	64	MEA	M	1	4	Measurements
1000		SG24	C	99	4	MEA
1010	65	MEA	M	1	4	Measurements
1000		SG24	C	99	4	MEA
1010	66	MEA	M	1	4	Measurements
1000		SG24	C	99	4	MEA
1010	67	MEA	M	1	4	Measurements
1030		SG25	C	99	4	DIM
1040	68	DIM	M	1	4	DIMENSIONS
1060		SG26	C	99	4	PCI-GIN
1070	69	PCI	M	1	4	PACKAGE IDENTIFICATION
1080	70	GIN	C	9999	5	Goods identity number
1060		SG26	C	99	4	PCI-GIN
1070	71	PCI	M	1	4	PACKAGE IDENTIFICATION
1080	72	GIN	C	9999	5	Goods identity number
0500		SG13	C	99999	1	CNI-SG14
0510	73	CNI	M	1	1	Consignment information
0540		SG14	M	99	2	STS-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-RFF-DTM-FTX-FTX-FTX-FTX-SG15-LOC-LOC-LOC-SG17-SG17-SG17-SG23
0550	74	STS	M	1	2	Status
0560	75	RFF	C	999	3	Reference
0560	76	RFF	C	999	3	Reference
0560	77	RFF	C	999	3	Reference
0560	78	RFF	C	999	3	Reference
0560	79	RFF	C	999	3	Reference
0560	80	RFF	C	999	3	Reference
0560	81	RFF	C	999	3	Reference
0560	82	RFF	C	999	3	Reference
0560	83	RFF	C	999	3	Reference
0560	84	RFF	C	999	3	Reference
0560	85	RFF	C	999	3	Reference
0560	86	RFF	C	999	3	Reference
0560	87	RFF	C	999	3	Reference

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Content
0560	88	RFF	C	999	3	Reference
0560	89	RFF	C	999	3	Reference
0560	90	RFF	C	999	3	Reference
0560	91	RFF	C	999	3	Reference
0570	92	DTM	C	9	3	Date/time/period
0590	93	FTX	C	9	3	Free text
0590	94	FTX	C	9	3	Free text
0590	95	FTX	C	9	3	Free text
0590	96	FTX	C	9	3	Free text
0600		SG15	C	9	3	NAD-SG16
0610	97	NAD	M	1	3	Name and address
0620		SG16	C	9	4	CTA-COM
0630	98	CTA	M	1	4	Contact information
0640	99	COM	C	9	5	Communication contact
0650	100	LOC	C	1	3	Place/location identification
0650	101	LOC	C	1	3	Place/location identification
0650	102	LOC	C	1	3	Place/location identification
0670		SG17	C	99	3	TDT
0680	103	TDT	M	1	3	Transport information
0670		SG17	C	99	3	TDT
0680	104	TDT	M	1	3	Transport information
0670		SG17	C	99	3	TDT
0680	105	TDT	M	1	3	Transport information
0910		SG23	C	99	3	GID-SG24-SG24-SG24-SG24-SG25-SG26-SG26
0920	106	GID	M	1	3	Goods item details
1000		SG24	C	99	4	MEA
1010	107	MEA	M	1	4	Measurements
1000		SG24	C	99	4	MEA
1010	108	MEA	M	1	4	Measurements
1000		SG24	C	99	4	MEA
1010	109	MEA	M	1	4	Measurements
1000		SG24	C	99	4	MEA
1010	110	MEA	M	1	4	Measurements
1030		SG25	C	99	4	DIM
1040	111	DIM	M	1	4	DIMENSIONS
1060		SG26	C	99	4	PCI-GIN
1070	112	PCI	M	1	4	PACKAGE IDENTIFICATION
1080	113	GIN	C	9999	5	Goods identity number
1060		SG26	C	99	4	PCI-GIN

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used




	Counter	No	Tag	St	MaxOcc	Level	Content
	1070	114	PCI	M	1	4	PACKAGE IDENTIFICATION
	1080	115	GIN	C	9999	5	Goods identity number
	1120	116	UNT	M	1	0	Message trailer
	0000	117	UNZ	M	1	0	Interchange trailer

Counter = Counter of segment/group within the standard
No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used




Branching Diagram of Used Segments/Groups

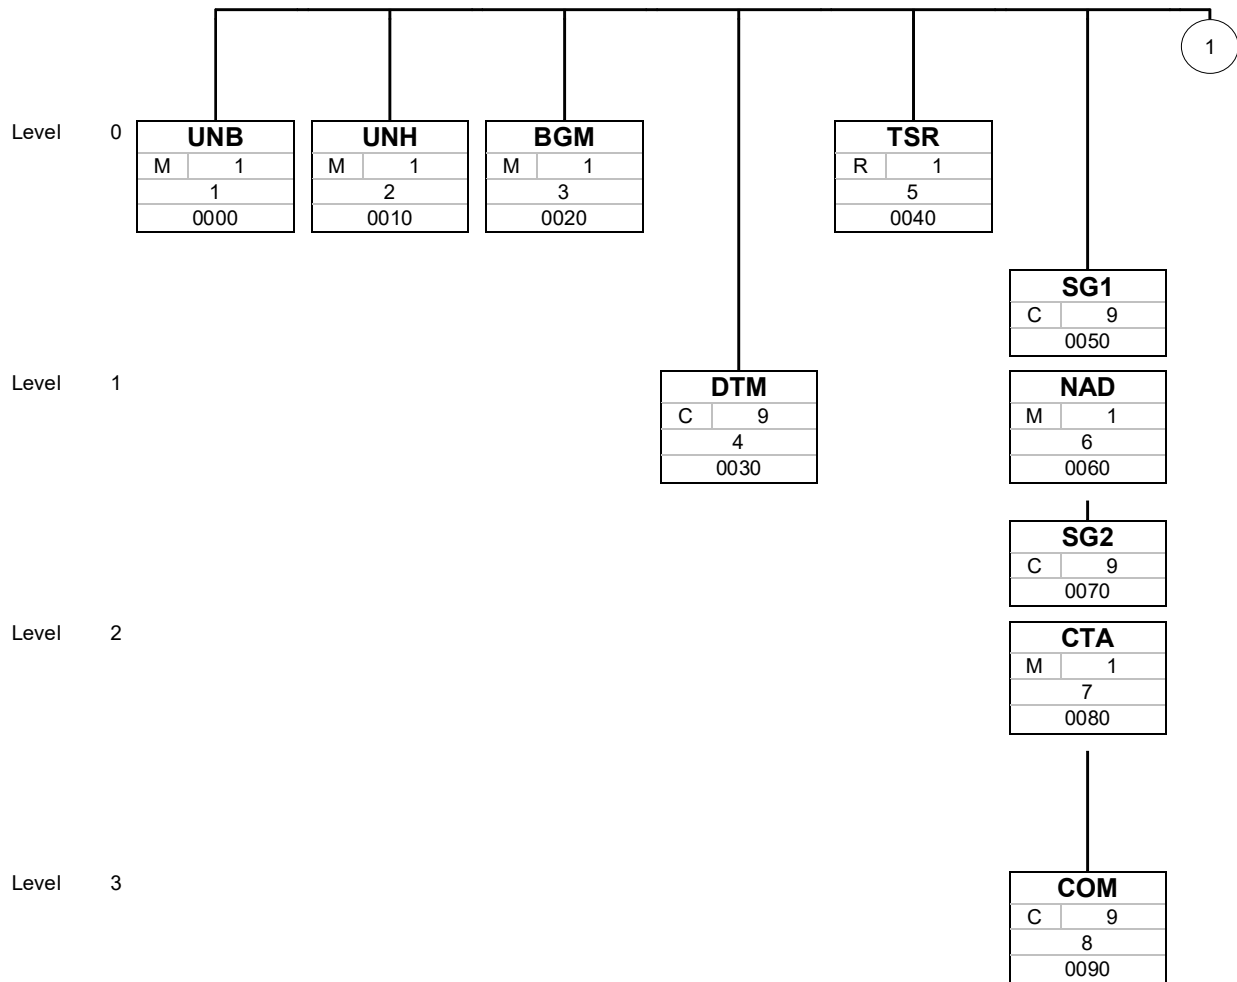


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

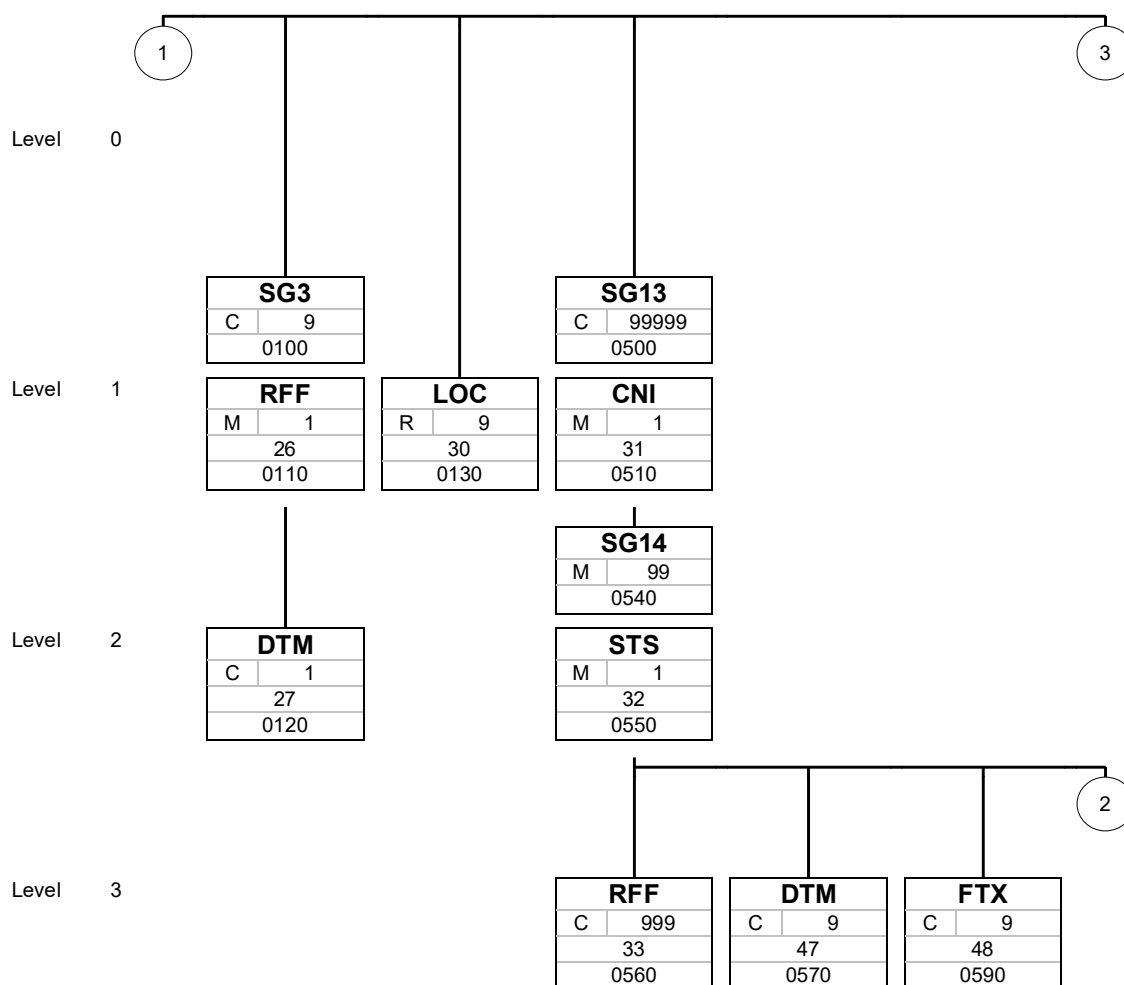


Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
 St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
 MaxOcc = Maximum occurrence of the segment/group
 No = Consecutive segment number
 Counter = Counter of segment/group within the standard

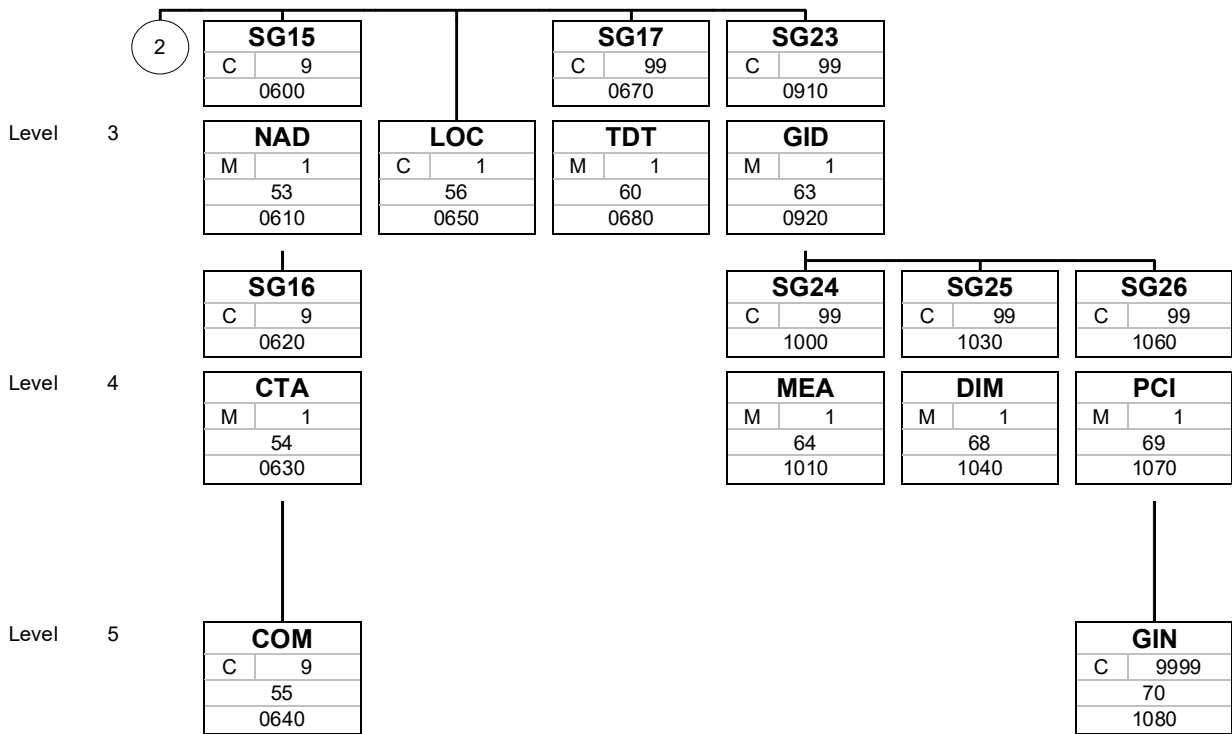

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard

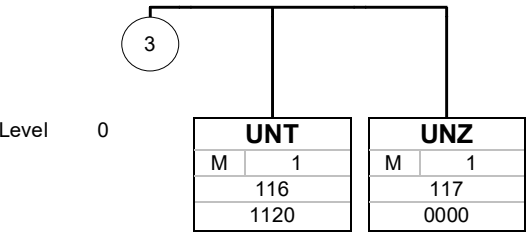

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number
Counter = Counter of segment/group within the standard



Segments

Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	1	UNB	M	1	0	INTERCHANGE HEADER
------	---	------------	---	---	---	--------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNB				
S001	Syntax identifier	M	M	
0001	Syntax identifier	M a4	M a4	General Notes From http://www.gefeg.com/jswg/cl/v4x/40200/cl1.htm : "UN/ECE level C As defined in ISO/IEC 8859-1: Information technology - Part 1: Latin alphabet No. 1." Basically, this means uppercase and lower case characters (A-Z, a-z) and western European special characters. List of valid codes UNOC UN/ECE level C
0002	Syntax version number	M an1	M an1	List of valid codes 4 Version 4
0080	Service code list directory version number	C an..6	N	
0133	Character encoding, coded	C an..3	N	
0076	Syntax release number	C an2	N	
S002	Interchange sender	M	M	
0004	Interchange sender identification	M an..35	M an..35	General Notes Sender identification
0007	Identification code qualifier	C an..4	M an..4	List of valid codes 14 GS1 ZZ Mutually defined
0008	Interchange sender internal identification	C an..35	N	
0042	Interchange sender internal sub-identification	C an..35	N	
S003	Interchange recipient	M	M	
0010	Interchange recipient identification	M an..35	M an..35	General Notes DSV recipient ID is 5790000110018
0007	Identification code qualifier	C an..4	M an..4	List of valid codes 14 GS1
0014	Interchange recipient internal identification	C an..35	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
0046	Interchange recipient internal sub-identification	C an..35	N	
S004	Date and time of preparation	M	M	
0017	Date	M n8	M n8	
0019	Time	M n4	M n4	
0020	Interchange control reference	M an..14	M an..14	
S005	Recipient reference/password details	C	N	
0022	Recipient reference/password	M an..14	N	
0025	Recipient reference/password qualifier	C an2	N	
0026	Application reference	C an..14	N	
0029	Processing priority code	C a1	N	
0031	Acknowledgement request	C n1	N	
0032	Interchange agreement identifier	C an..35	N	
0035	Test indicator	C n1	C n1	General Notes The feature with test indicator can be used. It will not identify that the file is sent to different systems. It will be used as a unique setup requirement. List of valid codes 1 Interchange is a test

Segment Remarks:**Example:**

UNB+UNOC:4+5912345678901:14+5790000110018:14+20151007:1147+859532+++++1'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0010 2 **UNH** M 1 0 Message header

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	
S009	Message identifier	M	M	
0065	Message type	M an..6	M M	List of valid codes IFTSTA International multimodal status report message
0052	Message version number	M an..3	M M	List of valid codes D Draft version/UN/EDIFACT Directory
0054	Message release number	M an..3	M an..3	List of valid codes 10B Release 2010 - B
0051	Controlling agency, coded	M an..3	M M	List of valid codes UN UN/CEFACT
0057	Association assigned code	C an..6	N	
0110	Code list directory version number	C an..6	N	
0113	Message type sub-function identification	C an..6	N	
0068	Common access reference	C an..35	N	
S010	Status of the transfer	C	N	
0070	Sequence of transfers	M n..2	N	
0073	First and last transfer	C a1	N	
S016	Message subset identification	C	N	
0115	Message subset identification	M an..14	N	
0116	Message subset version number	C an..3	N	
0118	Message subset release number	C an..3	N	
0051	Controlling agency, coded	C an..3	N	
S017	Message implementation guideline identification	C	N	
0121	Message implementation guideline identification	M an..14	N	
0122	Message implementation guideline version number	C an..3	N	
0124	Message implementation guideline release number	C an..3	N	
0051	Controlling agency, coded	C an..3	N	
S018	Scenario identification	C	N	
0127	Scenario identification	M an..14	N	
0128	Scenario version number	C an..3	N	
0130	Scenario release number	C an..3	N	
0051	Controlling agency, coded	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Segment Remarks:

Example:

UNH+123456789+IFTSTA:D:10B:UN'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0020	3	BGM	M	1	0	Beginning of message
------	---	------------	---	---	---	----------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	Document/message name	C	C	
1001	Document name code	C an..3	M an..3	List of valid codes 77 Consignment status report
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
1000	Document name	C an..35	N	
C106	Document/message identification	C	C	
1004	Document identifier	C an..70	M an..70	General Notes DSV reference for the status message. Transport number, shipment/consignment number/SSCC barcode
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	
1225	Message function code	C an..3	M an..3	List of valid codes 1 Cancellation 5 Replace 9 Original
4343	Response type code	C an..3	N	

Segment Remarks:**Example:**

BGM+77+DKSER-12345+9'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0030	4	DTM	C	9	1	Date/time/period
------	---	------------	---	---	---	------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	<p>List of valid codes</p> <p>137 Document issue date time</p>
2380	Date or time or period text	C an..35	M an..35	
2379	Date or time or period format code	C an..3	M an..3	<p>General Notes</p> <p>Possible to use either qualifier "203" or "204"</p> <p>List of valid codes</p> <p>203 CCYYMMDDHHMM</p> <p>204 CCYYMMDDHHMMSS</p>

Segment Remarks:**Example:**

DTM+137:201702101200:203'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0040	5	TSR	R	1	0	Transport service requirements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TSR				
C536	Contract and carriage condition	C	N	
4065	Contract and carriage condition code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C233	Service	C	C	
7273	Service requirement code	M an..3	M an..3	List of valid codes 1 Carrier loads 2 Full loads 3 Less than full loads
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7273	Service requirement code	C an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C537	Transport priority	C	C	
4219	Transport service priority code	M an..3	M an..3	List of valid codes 1 Express 2 High speed 3 Normal speed
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C703	Nature of cargo	C	N	
7085	Cargo type classification code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	

Segment Remarks:**General Notes**

DSV product is determined in combination with values used in TDT segment indicating Road, Air ,Sea and Courier divisions.

Note: this segment is required.

Example:

TSR++3+3'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0050		SG1	C	9	1	NAD-SG2
0060	6	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	List of valid codes DR Driver
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..35	General Notes Driver id.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	C an..3	List of valid codes 9 GS1 87 Assigned by carrier 91 Assigned by seller or seller's agent
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	N	
3036	Party name	M an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country subdivision details	C	N	
3229	Country subdivision identifier	C an..9	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country subdivision name	C an..70	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3251	Postal identification code	C an..17	N	
3207	Country identifier	C an..3	N	

Segment Remarks:**General Notes**

Contact information for Driver ex:

NAD+DR+5703459'

CTA+IC+:Driver name'

COM+040-11223344:TE'

COM+GREEN@MAIL.COM:EM'

COM+040-11223344:AL'

Example:

NAD+DR+5703459:::91'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0080	7	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function code	C an..3	C an..3	List of valid codes IC Information contact
C056	Contact details	C	C	
3413	Contact identifier	C an..17	N	
3412	Contact name	C an..256	C an..256	

Segment Remarks:**General Notes**

Contact information for Driver ex:

NAD+DR+5703459'

CTA+IC+:Driver name'

COM+040-11223344:TE'

Example:

CTA+IC+:Driver name'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	8	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication means type code	M an..3	M an..3	
				List of valid codes
				TE Telephone

Segment Remarks:**General Notes**

Contact information ex for Telephone:

NAD+DR+5703459'

CTA+IC+:Driver name'

COM+010-410998833:TE'

Example:

COM+010-410998833:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	9	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication means type code	M an..3	M an..3	
				List of valid codes
				EM Electronic mail

Segment Remarks:**General Notes**

Contact information ex for Email:

NAD+DR+5703459'

CTA+IC+:Driver name'

COM+contact@name.COM:EM'

Example:

COM+contact@name.com:EM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	10	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication means type code	M an..3	M an..3	
				List of valid codes
				AL Cellular phone

Segment Remarks:
Solutions Notes

General Notes

Contact information ex for Cellular phone number:
NAD+DR+5703459'
CTA+IC+:Driver name'
COM+010-480229933:AL'

Example:

COM+010-480229933:AL'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0050		SG1	C	9	1	NAD-SG2
0060	11	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	List of valid codes HA Haulier (HA is a DSV defined code for Road)
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..35	General Notes Haulier id.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	C an..3	List of valid codes 9 GS1 87 Assigned by carrier 91 Assigned by seller or seller's agent
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	N	
3036	Party name	M an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country subdivision details	C	N	
3229	Country subdivision identifier	C an..9	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country subdivision name	C an..70	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3251	Postal identification code	C an..17	N	
3207	Country identifier	C an..3	N	

Segment Remarks:**General Notes**

Contact information for Haulier ex:

NAD+HA+2014714::87'

CTA+ZHA+:Haulier name'

COM+010-410998833:TE'

COM+contact@name.com:EM'

COM+010-480229933:AL'

Example:

NAD+HA+2014714::87'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0080	12	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function code	C an..3	C an..3	List of valid codes ZHA Haulier (ZHA is a DSV defined code)
C056	Contact details	C	C	
3413	Contact identifier	C an..17	N	
3412	Contact name	C an..256	C an..256	

Segment Remarks:**General Notes**

Haulier contact information ex:

NAD+HA+2014714::87'

CTA+ZHA+:Haulier name'

COM+010-410998833:AL'

Example:

CTA+ZHA+:Haulier name'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	13	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Telephone number
3155	Communication means type code	M an..3	M an..3	List of valid codes TE Telephone

Segment Remarks:**General Notes**

Haulier contact information ex:
 NAD+HA+2014714::87'
 CTA+ZHA+:Haulier name'
 COM+010-410998833:TE'

Example:

COM+010-410998833:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	14	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Emailaddress
3155	Communication means type code	M an..3	M an..3	List of valid codes EM Electronic mail

Segment Remarks:**General Notes**

Haulier contact information ex:

NAD+HA+2014714::87'

CTA+ZHA+:Haulier name'

COM+contact@name.com:EM'

Example:

COM+contact@name.com:EM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	15	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Cellular phone number.
3155	Communication means type code	M an..3	M an..3	List of valid codes AL Cellular phone

Segment Remarks:**General Notes**

Haulier contact information ex:
 NAD+HA+2014714::87'
 CTA+ZHA+:Haulier name'
 COM+010-480229933:AL'

Example:

COM+010-480229933:AL'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0050		SG1	C	9	1	NAD-SG2
0060	16	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	List of valid codes ZDE Department (ZDE is a DSV defined code for Road)
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..35	General Notes Department Id.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	C an..3	List of valid codes 9 GS1 87 Assigned by carrier 91 Assigned by seller or seller's agent
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	N	
3036	Party name	M an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country subdivision details	C	N	
3229	Country subdivision identifier	C an..9	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country subdivision name	C an..70	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3251	Postal identification code	C an..17	N	
3207	Country identifier	C an..3	N	

Segment Remarks:**General Notes**

Contact information for DSV department contact, ex:

NAD+ZDE+2014714::91'

CTA+ZDE+:Department'

COM+010-410998833:TE'

COM+department@mail.com:EM'

COM+010-480229933:AL'

Example:

NAD+ZDE+2014714::91'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0080	17	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function code	C an..3	C an..3	List of valid codes ZDE Department (ZDE is a DSV defined code)
C056	Contact details	C	C	
3413	Contact identifier	C an..17	N	
3412	Contact name	C an..256	C an..256	

Segment Remarks:**General Notes**

Contact information for DSV department contact, ex:

NAD+ZDE+2014714::91'

CTA+ZDE+:Department'

COM+010-410998833:TE'

COM+department@mail.com:EM'

COM+010-480229933:AL'

Example:

CTA+ZDE+:Mr Green'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	18	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Telephone number
3155	Communication means type code	M an..3	M an..3	List of valid codes TE Telephone

Segment Remarks:**General Notes**

Contact information for DSV department contact, Telephone number ex:

NAD+ZDE+2014714::91'

COM+010-410998833:TE'

COM+040-11223344:TE'

Example:

COM+010-410998833:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	19	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Emailaddress
3155	Communication means type code	M an..3	M an..3	
				List of valid codes EM Electronic mail

Segment Remarks:**General Notes**

Contact information for DSV department contact, email ex:

NAD+ZDE+2014714::91'

CTA+ZDE+:Department'

COM+department@mail.com:EM'

Example:

COM+contact@name.com:EM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	20	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Cellular phone number.
3155	Communication means type code	M an..3	M an..3	List of valid codes AL Cellular phone

Segment Remarks:**General Notes**

Contact information for DSV department contact, Cellular phone ex:
 NAD+ZDE+2014714::91'
 CTA+ZDE+:Department'
 COM+010-480229933:AL'

Example:

COM+010-480229933:AL'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0050		SG1	C	9	1	NAD-SG2
0060	21	NAD	M	1	1	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	List of valid codes ZPL Attention (PL is a DSV defined code for Road)
C082	Party identification details	C	C	
3039	Party identifier	M an..35	M an..35	General Notes Attention party Id.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	C an..3	List of valid codes 9 GS1 87 Assigned by carrier 91 Assigned by seller or seller's agent
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	N	
3036	Party name	M an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country subdivision details	C	N	
3229	Country subdivision identifier	C an..9	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country subdivision name	C an..70	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3251	Postal identification code	C an..17	N	
3207	Country identifier	C an..3	N	

Segment Remarks:**General Notes**

Contact information for Attention, ex
 NAD+ZPL+2125020::9'
 CTA+ZPL+:Mister Green'
 COM+010-410998833:TE'
 COM+contact@name.com:EM'
 COM+010-480229933:AL'

Example:

NAD+ZPL+2125020::9'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0080	22	CTA	M	1	2	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function code	C an..3	C an..3	General Notes NAD+DR' CTA+IC+:Donald Duck' COM+040-11223344:TE' NAD+ZDE+2014714::91' CTA+ZDE+:Minnie Mouse' COM+DKSER:EM' NAD+HA+2014714::87' CTA+ZHA+:Daisy Duck' COM+040-11223344:AL' NAD+ZPL+2125020::9' CTA+ZPL+:Mister Green' COM+GREEN@MAIL.COM:EM'
List of valid codes ZPL Attention (ZPL is a DSV defined code)				
C056	Contact details	C	C	
3413	Contact identifier	C an..17	N	
3412	Contact name	C an..256	C an..256	

Segment Remarks:**General Notes**

Contact information for Attention, ex
 NAD+ZPL+2125020::9'
 CTA+ZPL+:Mister Green'
 COM+010-410998833:TE'
 COM+contact@name.com:EM'
 COM+010-480229933:AL'

Example:

CTA+ZPL+:Mr Green'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	23	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Telephone number
3155	Communication means type code	M an..3	M an..3	List of valid codes TE Telephone

Segment Remarks:**General Notes**

Contact information for Attention, ex for Telephone:
 NAD+ZPL+2125020::9'
 CTA+ZPL+:Mister Green'
 COM+010-410998833:TE'

Example:

COM+010-410998833:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	24	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Emailaddress
3155	Communication means type code	M an..3	M an..3	
				List of valid codes EM Electronic mail

Segment Remarks:**General Notes**

Contact information for Attention, ex for email:
 NAD+ZPL+2125020::9'
 CTA+ZPL+:Mister Green'
 COM+contact@name.com:EM'

Example:

COM+contact@name.com:EM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0070		SG2	C	9	2	CTA-COM
0090	25	COM	C	9	3	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	General Notes Cellular phone number.
3155	Communication means type code	M an..3	M an..3	List of valid codes AL Cellular phone

Segment Remarks:**General Notes**

Contact information for Attention, ex for Cellular phone:

NAD+ZPL+2125020::9'

CTA+ZPL+:Mister Green'

COM+010-480229933:AL'

Example:

COM+010-480229933:AL'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0100		SG3	C	9	1	RFF-DTM
0110	26	RFF	M	1	1	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	List of valid codes VT Motor vehicle identification number
1154	Reference identifier	C an..70	C an..70	General Notes License plate number.
1156	Document line identifier	C an..6	C an..6	General Notes Country code for registration/license plate number
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**General Notes**

SG3/RFF+VT is used for Vehicle id and should be used in combination with SG3/DTM+145 for the pickup date and time.

Example:

RFF+VT:VY91262:DK'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0100		SG3	C	9	1	RFF-DTM
0120	27	DTM	C	1	2	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	List of valid codes 145 Event date
2380	Date or time or period text	C an..35	C an..35	
2379	Date or time or period format code	C an..3	C an..3	List of valid codes 203 CCYYMMDDHHMM 204 CCYYMMDDHHMMSS

Segment Remarks:
Courier Notes

General Notes

SG3/RFF+VT must be followed by SG3/DTM+145 with the pickup date and time.

Example:

DTM+145:201703071200:203'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0100		SG3	C	9	1	RFF
0110	28	RFF	M	1	1	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				AFB Cargo manifest number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AFB:FLUGNX-0392'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0100		SG3	C	9	1	RFF
0110	29	RFF	M	1	1	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	List of valid codes ALL Message batch number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+ALL:170307'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0130	30	LOC	R	9	1	Place/location identification
------	----	------------	---	---	---	-------------------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	List of valid codes 193 Branch location
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	
1131	Code list identification code	C an..17	C an..17	List of valid codes 162 CEC (Commission of the European Communities), DG/XIII-D-5
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	N	
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**General Notes**

LOC+193 is required in which Country code for Branch location should be found in SG3 LOC/C517.3225

Example:

LOC+193+DK:162'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0500		SG13	C	99999	1	CNI-SG14
General Notes CNI group to be used for status on shipment/consignment level. There must be one SG13 CNI group per shipment/consignment.						
0510	31	CNI	M	1	1	Consignment information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CNI				
1490	Consolidation item number	C n..5	C n..5	General Notes For statuses at the shipment/consignment level, increment SG13/CNI/1490 by one for each shipment/consignment/SG13. List of valid codes 1 [n] for Consignment level statuses
C503	Document/message details	C	C	
1004	Document identifier	C an..70	C an..70	General Notes Shipment/consignment number, transport number.
1373	Document status code	C an..3	N	
1366	Document source description	C an..70	C an..70	List of valid codes MasterBill MasterBill I TransportMaster Transport SSN tMaster STP SSN SID STP SID
3453	Language name code	C an..3	N	
1056	Version identifier	C an..9	C an..9	
1060	Revision identifier	C an..6	N	
1312	Consignment load sequence identifier	C n..4	N	

Segment Remarks:**General Notes**

The value in element 1490 must increment for each shipment if message contains multiple shipments (one per SG13 group). Item level status information belonging to a shipment must be placed in the same CNI group as the shipment level status they belong to, but grouped by event, reasons & date in separate STS segment groups (see STS segment).

(For messages containing only item level (SSCC barcode) statuses there must be only one CNI group (with element 1490 equal to 1) and one STS group (with element 9015 equal to ZGI). See SG13[2], below.)

Example:

CNI+1+00370716487163671311::MasterBill::X'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0550	32	STS	M	1	2	Status

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
STS				
C601	Status category	C	C	
9015	Status category code	M an..3	M an..3	General Notes ZCN for Consignment level List of valid codes ZCN Consignment level
1131	Code list identification code	C an..17	C an..17	List of valid codes Container Container (DSV code) r Booking (DSV code) Booking LoadPlan (DSV code) LoadPlan
3055	Code list responsible agency code	C an..3	N	
C555	Status	C	C	
4405	Status description code	M an..3	M an..3	List of valid codes 127 Measured 1 Arrival (A) 13 Collected (C) 14 D (Delivery - DSV defined code) 21 Delivered (D) 24 D (Departure - DSV defined code) 25 K (Kept in storage - DSV defined code) 27 Departed/Loaded (L) 29 A (Arrival - DSV defined code) 48 L (Departure - DSV defined code) 54 Not Collected 55 Not Delivered 56 K (Kept in storage - DSV defined code) 90 K (Kept in storage - DSV defined code) 113 L (Departure - DSV defined code) 152 CR (Collection Reloaded - DSV - defined code) 151 DR (Delivery Reloaded - DSV defined code) 153 AC (Arrive Collection - DSV defined code) 154 AD (Arrive Delivery - DSV defined code) 155 SC (Start Collection - DSV defined code) 156 SD (Start Delivery - DSV defined code) 157 CC (Cancel Collection - DSV defined code) 158 CD (Cancel Delivery - DSV defined code) 349 L (Departure - DSV defined code)
1131	Code list identification code	C an..17	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3055	Code list responsible agency code	C an..3	N	
4404	Status description	C an..35	C an..35	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data Maintenance Request (DMR) 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				202 46 (Customer clearance in progress - DSV defined code) 203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code) 234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code) 292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code) 773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code) 91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) CFM NZ (Not in conformity - DSV defined code) DIL NB (NFL booking not complete - DSV defined code) others code) PRE NZ (Not in conformity - DSV defined code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 WA (Wrong address - DSV defined code) Z4 NZ (Not in conformity - DSV defined code)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Z5 R (Refused . no reason - DSV defined code) Z14 WA (Wrong address - DSV defined code) ZTJ NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) Z (In Conformity - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code) Traffic Jam (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code) 202 46 (Customer clearance in progress - DSV defined code) 203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code) 234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code) 292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code) 773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code) others NB (NFL booking not complete - DSV defined code) PRE code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code) 202 46 (Customer clearance in progress - DSV defined code) 203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code) 234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code) 773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code) 91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code) others NB (NFL booking not complete - DSV defined code) PRE code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency	C an..3	N	

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
9012	Status reason description code	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code) 202 46 (Customer clearance in progress - DSV defined

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code) 234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code) 292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code) 773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code) 91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code) others NB (NFL booking not complete - DSV defined code) PRE code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 44 (Delivered with claim - DSV defined code) 115 45 (Difference against information - DSV defined code) 117 46 (Customer clearance in progress - DSV defined code) 120 M (Missing package - DSV defined code) 126 TD (Unknown - DSV defined code) 201 46 (Customer clearance in progress - DSV defined code) 202 Z1 (Without signature - DSV defined code) 203 Z2 (Handled without scanning item - DSV defined code) 204 CQ (Queue at customers - DSV defined code) 205 AN (Authorized Site-Id not scanned - DSV defined code) 209 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 213 47 (Delivery scheduled - DSV defined code) 218 48 (Address not complete - DSV defined code) 219 DP (Damaged packaging - DSV defined code) 234 24 (Fixed delivery date - DSV defined code) 241 WA (Wrong address - DSV defined code) 242 49 (Missing document - DSV defined code) 251 NY (Notified to customer - DSV defined code) 253 RC (Refused . Cash on delivery - DSV defined code) 265 R (Refused . no reason - DSV defined code) 269 RD (Not delivered . return to depo - DSV defined code) 284 NH (Nobody at home - DSV defined code) 286 RP (Refused . no part orders - DSV defined code) 288 RR (Refused . spoiled state - DSV defined code) 291 MP (Missing papers - DSV defined code) 292 50 (Refused . spoiled state - DSV defined code) 309 RK (Refused . no payment COD - DSV defined code) 310 51 (Package open - DSV defined code) 311 Z (In Conformity - DSV defined code) 330 52 (Claim open - DSV defined code) 331 53 (Partial missing - DSV defined code) 338 54 (Destroyed - DSV defined code) 341 55 (Company closed - DSV defined code) 771 Z1 (Delivered without signature - DSV defined code) 772 UR (Undefined reason - DSV defined code) 773 NY (Notified to customer - DSV defined code) 3117 DP (Damaged packaging - DSV defined code) 3157

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 MP (Missing papers - DSV defined code) 91011 RM (Refused . missing package - DSV defined code) 91012 M (Missing package - DSV defined code) 91013 DY (Dirty - DSV defined code) 91014 NZ (Not in conformity - DSV defined code) 91015 NB (NFL booking not complete - DSV defined code) DIL others PRE code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	

Segment Remarks:**General Notes**

SG14/STS/C601.9015 with code ZCN is used to indicate status on shipment level.

For messages with statuses on shipment level:

- The STS segment can be repeated if there are different status reason codes for the goods items on the shipment.
- Goods items (SG23/GID) related to a specific kind of status code must be grouped together under the reported status code.

(For messages with statuses on item/SSCC barcode level, please see SG13[2]/SG14/STS.)

Example:

STS+ZCN:Container+1:::Arrival+5+6+8+62+30 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	33	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				UCN Unique consignment reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+UCN:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	34	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	General Notes Shipment Id assigned from IDS Logistic Network in Germany List of valid codes IDS IDS reference number (CargoLink defined code)
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+IDS:4908600397719007'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	35	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	Air Notes Not used. Sea Notes Not used. Solutions Notes Not used. General Notes ZZA is used for Quality of scanning towards Road application CargoLink. List of valid codes ZZA Quality of scanning (CargoLink defined code)
1154	Reference identifier	C an..70	C an..70	Air Notes Not used. Sea Notes Not used. Solutions Notes Not used.
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+ZZA:61'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	36	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				SID Site ID (DSV defined code)
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+SID:6184430'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	37	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				QLS QLS reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+QLS:00373323995883365533'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	38	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				FF Consignment identifier, freight forwarder assigned
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+FF:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	39	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	General Notes AAM is used in Swedish traffic and contains Swedish waybill number. List of valid codes AAS Transport contract document identifier
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AAS : 752 6538793 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	40	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	General Notes AAM is used in Norwegian traffic and contains Norwegian waybill number. List of valid codes AAM Waybill number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AAM:40257065930729554502'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	41	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				AAO Consignment identifier, consignee assigned
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AAO:57065930729554502'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	42	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	General Notes RFF+SRN is GINC = Global Identification Number for Consignment assigned from GS1, with 401 prefix. List of valid codes SRN Shipment reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**General Notes**

SRN is used for GS1 code reference numbers, 17 characters long.

Example:

RFF+SRN:57065930729554502'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	43	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				BH House bill of lading number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+BH:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	44	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				CU Consignment identifier, consignor assigned
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+CU:ORDER123'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	45	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				MB Master bill of lading number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+MB:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	46	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	List of valid codes ABT Goods declaration document identifier, Customs
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	C an..6	General Notes SG14 RFF.C506/1156 should be used when SG14 RFF.C506/1153= "ABT" to identify the type of CustomsEntryNumber. Mainly used for Air&Sea business.
				List of valid codes PMT Permit number CER Certificate AT ATA Carnet TS Transhipment
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**General Notes**

SG14 RFF+ABT should be used for CustomsEntryNumber for Air&Sea shipment statuses, in combination with type of CustomsEntryNumber as Identifier in SG14 RFF/C506.1156. Document issue date should be used in SG14 DTM+137. Mainly used for Air&Sea business.

ex:

RFF+ABT:Permittest123:PMT'
 DTM+137:202006241230:203'

Example:

RFF+ABT:123456789:PMT'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0570	47	DTM	C	9	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	List of valid codes 334 Status change date/time 137 Document issue date time
2380	Date or time or period text	C an..35	C an..35	
2379	Date or time or period format code	C an..3	C an..3	General Notes Possible to use either qualifier "203" or "204" List of valid codes 203 CCYYMMDDHHMM 204 CCYYMMDDHHMMSS

Segment Remarks:**General Notes**

DTM+334 to be used for Status date.

DTM+137 to be used for Document issue date time when RFF+ABT is used for "CustomsEntryNumber".

Example:

DTM+334:201610211200:203'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	48	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	
				List of valid codes
				AAI General information
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

```
FTX+AAI+++Remarks:for:the:status:scanning'
```

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	49	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	List of valid codes AHN Status details
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+AHN+++Status:information:from:the:scanning'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	50	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	Road Notes FTX+ZEL is a DSV specific qualifier to identify status eventcode from IDS.
				List of valid codes ZEL Status eventcode IDS
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZEL+++IDS:ID27'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	51	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	
				List of valid codes
				ACD Reason
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ACD+++Status Reason'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	52	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	General Notes For EventParam use ZEP List of valid codes ZEP EventParam
4453	Free text function code	C an..3	N	
C107	Text reference	C	C	
4441	Free text description code	M an..17	R an..17	General Notes Required to use 4441 when ZEP is used in 4451.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZEP++Location+CATOR'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0600		SG15	C	9	3	NAD-SG16
0610	53	NAD	M	1	3	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	List of valid codes AP Accepting party
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	N	
3036	Party name	M an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country subdivision details	C	N	
3229	Country subdivision identifier	C an..9	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country subdivision name	C an..70	N	
3251	Postal identification code	C an..17	N	
3207	Country identifier	C an..3	N	

Segment Remarks:**Example:**

NAD+AP'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0620		SG16	C	9	4	CTA-COM
0630	54	CTA	M	1	4	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function code	C an..3	C an..3	List of valid codes GR Goods receiving contact
C056	Contact details	C	C	
3413	Contact identifier	C an..17	N	General Notes Name of Goods receiving contact (Accepting party)
3412	Contact name	C an..256	C an..256	

Segment Remarks:**Example:**

CTA+GR+:Mr Blue'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0620		SG16	C	9	4	CTA-COM
0640	55	COM	C	9	5	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication means type code	M an..3	M an..3	
				List of valid codes
			TE	Telephone

Segment Remarks:**Road Notes**

Not used towards Road application.

Example:

COM+010-11223344:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	56	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	General Notes All qualifiers except "89", "138" and "ZEL" will be handled as Place of Status Location. List of valid codes 89 Place of registration
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	General Notes Site ID
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	C an..256	General Notes Use name of location or UN locode.
C519	Related location one identification	C	C	
3223	First related location identifier	C an..35	C an..35	General Notes GPS Longitude coordinates
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	C	
3233	Second related location identifier	C an..35	C an..35	General Notes GPS Latitude coordinates
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**General Notes**

Place of registration, if LOC 3227 is 89 and LOC C519.3223 is used then this should be GPS Longitude coordinates. If LOC 3227 is 89 and LOC C553.3233 is used, then this should be GPS Latitude coordinates.

Example:

LOC+89+6184430:::MSDK+12.4609433333333+55.68391'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	57	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	
				List of valid codes 138 Weighting place
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	C an..256	General Notes Use name of location or UN locode.
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**General Notes**

LOC+138 should be used for Weighting place. If LOC+138 is used then MEA SG24 & DIM SG25 should be used as well.

Example:

LOC+138+2640:::CPH'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	58	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	List of valid codes ZEL Status Location for IDS
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	General Notes Use Code for IDS Location
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	General Notes Use name of IDS Location
3224	Location name	C an..256	C an..256	
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**General Notes**

LOC+ZEL is a DSV specific qualifier to identify status location from IDS.

Example:

LOC+ZEL+326:::HAM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	59	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	Air Notes Status location Road Notes Not to be used for Road Sea Notes Status location List of valid codes Z01 Status Location for CW1
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	Air Notes UN location code for status Road Notes Not to be used for Road Sea Notes UN location code for status
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	C an..256	
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**Road Notes**

LOC+Z01 is not to be used for Road

General Notes

LOC+Z01 is a DSV specific qualifier to identify status location for Air & Sea

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Example:
LOC+Z01+DEHAM:::Hamburg'



Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	60	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	List of valid codes 1 Maritime transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Sea Notes**

This is a required segment for status messages for sea shipments.

Example:

TDT+20++1 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	61	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	List of valid codes 3 Road transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Road Notes**

This is a required segment for status messages for road shipments.

Example:

TDT+20++3 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	62	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	List of valid codes 4 Air transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Air Notes**

This is a required segment for status messages for air shipments.

Example:

TDT+20++4 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0910		SG23	C	99	3	GID-SG24-SG25-SG26
0920	63	GID	M	1	3	Goods item details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GID				
1496	Goods item number	C an..6	C an..6	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
	code			

Segment Remarks:**Example:**

GID+1 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	64	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes WT Weights
C502	Measurement details	C	C	
6313	Measured attribute code	C an..3	C an..3	List of valid codes AAB Goods item gross weight
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes KGM kilogram
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+WT+AAB+KGM:100'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	65	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes WT Weights
C502	Measurement details	C	C	
6313	Measured attribute code	C an..3	C an..3	List of valid codes ADZ Declared net weight
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes KGM kilogram
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+WT+ADZ+KGM: 90 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	66	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes VOL Volume
C502	Measurement details	C	N	
6313	Measured attribute code	C an..3	N	General Notes Not used for volume
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes MTQ cubic metre
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+VOL++MTQ:2.0'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	67	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes LMT Loading meters
C502	Measurement details	C	N	
6313	Measured attribute code	C an..3	N	General Notes Not used for loading meters
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes MTR metre
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+LMT++MTR: 2 . 4 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1030		SG25	C	99	4	DIM
1040	68	DIM	M	1	4	DIMENSIONS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DIM				
6145	Dimension type code qualifier	M an..3	M an..3	
C211	Dimensions	M	M	
6411	Measurement unit code	M an..8	M an..8	General Notes Qualifier "CMT" or "MTR" can be used. List of valid codes MTR metre CMT centimetre
6168	Length measure	C n..15	C n..15	
6140	Width measure	C n..15	C n..15	
6008	Height measure	C n..15	C n..15	

Segment Remarks:**Example:**

DIM+1+MTR:1:2:3'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
		General Notes Message examples: PCI+17'				
1070	69	PCI	M	1	4	PACKAGE IDENTIFICATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PCI				
4233	Marking instructions code	C an..3	C an..3	List of valid codes 17 Seller's instructions
C210	Marks & labels	C	N	
7102	Shipping marks description	M an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
8169	Full or empty indicator code	C an..3	N	
C827	Type of marking	C	N	
7511	Marking type code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	

Segment Remarks:**Example:**

PCI+17'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
		General Notes Message examples: PCI+17'				
1080	70	GIN	C	9999	5	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Object identification code qualifier	M an..3	M an..3	General Notes Qualifier BN used in connection to PCI+17. List of valid codes BN Serial number
C208	Identity number range	M	M	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	

Segment Remarks:**General Notes**

Message example:
 GIN+BN+123456789'

Example:

GIN+BN+3298415480:35710532112+21141281:21158364+21158384:21158344+21158324:21158304+21158384:21158314'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
1070	71	PCI	M	1	4	PACKAGE IDENTIFICATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PCI				
4233	Marking instructions code	C an..3	C an..3	List of valid codes 18 Carrier's instructions
C210	Marks & labels	C	N	
7102	Shipping marks description	M an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
8169	Full or empty indicator code	C an..3	N	
C827	Type of marking	C	N	
7511	Marking type code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	

Segment Remarks:**General Notes**

Message examples:

PCI+18'

Example:

PCI+18'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
1080	72	GIN	C	9999	5	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Object identification code qualifier	M an..3	M an..3	General Notes Qualifier AW used in connection with PCI+18. SSCC are expected to NOT include the qualifier 00. List of valid codes AW Serial shipping container code
C208	Identity number range	M	M	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	

Segment Remarks:**General Notes**

Message example:

GIN+AW+373999991234567899'

Example:

GIN+AW+357065933298415480:357105321121122136+357105321121141281:357105321121158364+357105321121158384:357105321121158344+357105321121158324:357105321121158304+357105321121158384:357105321121158314

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0500 **SG13** C 99999 1 **CNI-SG14**

Air Notes

Not used

Sea Notes

Not used

General Notes

CNI group to be used for status on Colli (SSCC barcode) item level.

0510 73 **CNI** M 1 1 **Consignment information**

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CNI				
1490	Consolidation item number	C n..5	C n..5	List of valid codes 0 CNI+0 for Goods item level
C503	Document/message details	C	C	
1004	Document identifier	C an..70	C an..70	General Notes The SSCC barcode for which this is a status message.
1373	Document status code	C an..3	N	
1366	Document source description	C an..70	N	
3453	Language name code	C an..3	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	
1312	Consignment load sequence identifier	C n..4	N	

Segment Remarks:**General Notes**

SG13/CNI/1490 always has the value 0 for Status on Goods item (SSCC barcode) level

Example:

CNI+0+00370716487163671311 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0550	74	STS	M	1	2	Status

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
STS				
C601	Status category	C	C	
9015	Status category code	M an..3	M an..3	List of valid codes ZGI Goods item level
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C555	Status	C	C	
4405	Status description code	M an..3	M an..3	List of valid codes 127 Measured 1 Arrival (A) 13 Collected (C) 14 D (Delivery - DSV defined code) 21 Delivered (D) 24 D (Departure - DSV defined code) 25 K (Kept in storage - DSV defined code) 27 Departed/Loaded (L) 29 A (Arrival - DSV defined code) 48 L (Departure - DSV defined code) 54 Not Collected 55 Not Delivered 56 K (Kept in storage - DSV defined code) 90 K (Kept in storage - DSV defined code) 113 L (Departure - DSV defined code) 152 CR (Collection Reloaded - DSV - defined code) 151 DR (Delivery Reloaded - DSV defined code) 153 AC (Arrive Collection - DSV defined code) 154 AD (Arrive Delivery - DSV defined code) 155 SC (Start Collection - DSV defined code) 156 SD (Start Delivery - DSV defined code) 157 CC (Cancel Collection - DSV defined code) 158 CD (Cancel Delivery - DSV defined code) 349 L (Departure - DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
4404	Status description	C an..35	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Not used
				General Notes Status Reason codes mainly used for Road business.
				List of valid codes
				5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code) 202 46 (Customer clearance in progress - DSV defined code) 203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 DSV defined code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code) 292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code) 773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code) 91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code) others NB (NFL booking not complete - DSV defined code) PRE code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Goods not barcoded
			0	Z (In conformity - DSV defined code)
			109	NH (Nobody at home - DSV defined code)
			112	43 (In warehouse:wait customer - DSV defined code)
			114	44 (Delivered with claim - DSV defined code)
			115	45 (Difference against information - DSV defined code)
			117	46 (Customer clearance in progress - DSV defined code)
			120	M (Missing package - DSV defined code)
			126	TD (Unknown - DSV defined code)
			201	46 (Customer clearance in progress - DSV defined code)
			202	Z1 (Without signature - DSV defined code)
			203	Z2 (Handled without scanning item - DSV defined code)
			204	CQ (Queue at customers - DSV defined code)
			205	Z2 (Handled without scanning item - DSV defined code)
			209	CQ (Queue at customers - DSV defined code)
			213	AN (Authorized Site-Id not scanned - DSV defined code)
			218	AN (Authorized Site-Id not scanned - DSV defined code)
			219	Z3 (In Conformity - Consolidate Transport Item - DSV defined code)
			234	47 (Delivery scheduled - DSV defined code)
			241	48 (Address not complete - DSV defined code)
			242	48 (Address not complete - DSV defined code)
			251	DP (Damaged packaging - DSV defined code)
			253	DP (Damaged packaging - DSV defined code)
			265	24 (Fixed delivery date - DSV defined code)
			269	WA (Wrong address - DSV defined code)
			284	49 (Missing document - DSV defined code)
			286	NY (Notified to customer - DSV defined code)
			288	RC (Refused . Cash on delivery - DSV defined code)
			291	RC (Refused . Cash on delivery - DSV defined code)
			292	R (Refused . no reason - DSV defined code)
			309	RD (Not delivered . return to depo - DSV defined code)
			310	RD (Not delivered . return to depo - DSV defined code)
			311	NH (Nobody at home - DSV defined code)
			330	RP (Refused . no part orders - DSV defined code)
			331	RR (Refused . spoiled state - DSV defined code)
			338	MP (Missing papers - DSV defined code)
			341	50 (Refused . spoiled state - DSV defined code)
			771	RK (Refused . no payment COD - DSV defined code)
			772	RK (Refused . no payment COD - DSV defined code)
			773	51 (Package open - DSV defined code)
			3117	Z (In Conformity - DSV defined code)
			3157	52 (Claim open - DSV defined code)
			5618	53 (Partial missing - DSV defined code)
			20241	54 (Destroyed - DSV defined code)
			56117	55 (Company closed - DSV defined code)
			91001	Z1 (Delivered without signature - DSV defined code)
			91002	code)
			91004	UR (Undefined reason - DSV defined code)
			91005	NY (Notified to customer - DSV defined code)
			91006	DP (Damaged packaging - DSV defined code)
			91007	M (Missing package - DSV defined code)
			91008	X (In transit . external - DSV defined code)
			91009	RS (Refused . missing package - DSV defined code)
			91010	code)
			91011	MP (Missing papers - DSV defined code)
			91012	RM (Refused . missing package - DSV defined code)
			91013	code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code) others NB (NFL booking not complete - DSV defined code) PRE Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data Maintenance Request (DMR) 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code) 112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code) 202 46 (Customer clearance in progress - DSV defined code) 203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code) 234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code) 292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code) 91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code) others NB (NFL booking not complete - DSV defined code) PRE code) Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Status Reason codes mainly used for Road business.
				List of valid codes
				5 Appointment scheduled
				6 Attempt unsuccessful
				7 Business closed
				8 Changed schedule
				12 Customer arrangements
				14 Damaged
				19 Discrepancy
				17 Departure delay
				20 Dock strike
				30 Incorrect address
				34 Means of transport damaged
				35 Mechanical breakdown
				37 Missing and/or incorrect documents
				38 New delivery arrangements
				41 Not loaded
				43 Package not ready
				44 Package tracking number unknown
				45 Partly missing
				47 Payment refused
				49 Refused without reason given
				57 Tracking information unavailable
				60 Unacceptable condition
				62 Unknown
				63 Weather conditions
				66 Stolen
				69 Undefined incident attributed to carrier
				80 Entry point assessment of Data Maintenance
				82 Request (DMR) latest comment
				87 International assessment group reporting on Data
				107 Maintenance Request (DMR)
				108 Error
				Article identification not found in computer system
				Goods not barcoded
				0 Z (In conformity - DSV defined code)
				109 NH (Nobody at home - DSV defined code)
				112 43 (In warehouse:wait customer - DSV defined code)
				114 code)
				115 44 (Delivered with claim - DSV defined code)
				117 45 (Difference against information - DSV defined code)
				120 code)
				126 M (Missing package - DSV defined code)
				201 TD (Unknown - DSV defined code)
				202 46 (Customer clearance in progress - DSV defined code)
				203 code)
				204 Z1 (Without signature - DSV defined code)
				205 Z2 (Handled without scanning item - DSV defined code)
				209 code)
				213 CQ (Queue at customers - DSV defined code)
				218 AN (Authorized Site-Id not scanned - DSV defined code)
				219 code)
				234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code)
				241 code)
				242 47 (Delivery scheduled - DSV defined code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 R (Refused . no reason - DSV defined code) 292 RD (Not delivered . return to depo - DSV defined code) 309 NH (Nobody at home - DSV defined code) 310 RP (Refused . no part orders - DSV defined code) 311 RR (Refused . spoiled state - DSV defined code) 330 MP (Missing papers - DSV defined code) 331 50 (Refused . spoiled state - DSV defined code) 338 RK (Refused . no payment COD - DSV defined code) 341 51 (Package open - DSV defined code) 771 Z (In Conformity - DSV defined code) 772 52 (Claim open - DSV defined code) 773 53 (Partial missing - DSV defined code) 3117 54 (Destroyed - DSV defined code) 3157 55 (Company closed - DSV defined code) 5618 Z1 (Delivered without signature - DSV defined code) 20241 91002 (Undefined reason - DSV defined code) 56117 91004 NY (Notified to customer - DSV defined code) 91001 91005 DP (Damaged packaging - DSV defined code) 91002 91006 M (Missing package - DSV defined code) 91004 91007 X (In transit . external - DSV defined code) 91005 91008 RS (Refused . missing package - DSV defined code) 91006 91009 MP (Missing papers - DSV defined code) 91007 91010 RM (Refused . missing package - DSV defined code) 91008 91011 M (Missing package - DSV defined code) 91009 91012 DY (Dirty - DSV defined code) 91010 91013 NZ (Not in conformity - DSV defined code) 91011 91014 NB (NFL booking not complete - DSV defined code) 91012 91015 PRE (Not in conformity - DSV defined code) 91013 91014 NZ (Not in conformity - DSV defined code) 91014 91015 NZ (Not in conformity - DSV defined code) 91015 91014 WA (Wrong address - DSV defined code) DIL 91015 NZ (Not in conformity - DSV defined code) others 91015 NZ (Not in conformity - DSV defined code) PRE 91015 NZ (Not in conformity - DSV defined code) Z1 91015 NZ (Not in conformity - DSV defined code) Z2 91015 NZ (Not in conformity - DSV defined code) Z3 91015 NZ (Not in conformity - DSV defined code) Z4 91015 WA (Wrong address - DSV defined code) Z5 91015 NZ (Not in conformity - DSV defined code) Z14 91015 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	
C556	Status reason	C	C	
9013	Status reason description code	M an..3	M an..3	Air Notes Not used Sea Notes Not used General Notes Status Reason codes mainly used for Road business. List of valid codes 5 Appointment scheduled 6 Attempt unsuccessful 7 Business closed 8 Changed schedule 12 Customer arrangements 14 Damaged 19 Discrepancy 17 Departure delay 20 Dock strike 30 Incorrect address 34 Means of transport damaged 35 Mechanical breakdown 37 Missing and/or incorrect documents 38 New delivery arrangements 41 Not loaded 43 Package not ready 44 Package tracking number unknown 45 Partly missing 47 Payment refused 49 Refused without reason given 57 Tracking information unavailable 60 Unacceptable condition 62 Unknown 63 Weather conditions 66 Stolen 69 Undefined incident attributed to carrier 80 Entry point assessment of Data Maintenance 82 Request (DMR) latest comment 87 International assessment group reporting on Data 107 Maintenance Request (DMR) 108 Error Article identification not found in computer system Goods not barcoded 0 Z (In conformity - DSV defined code) 109 NH (Nobody at home - DSV defined code)

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				112 43 (In warehouse:wait customer - DSV defined code) 114 code) 115 44 (Delivered with claim - DSV defined code) 117 45 (Difference against information - DSV defined code) 120 code) 126 M (Missing package - DSV defined code) 201 TD (Unknown - DSV defined code) 202 46 (Customer clearance in progress - DSV defined code) 203 code) 204 Z1 (Without signature - DSV defined code) 205 Z2 (Handled without scanning item - DSV defined code) 209 code) 213 CQ (Queue at customers - DSV defined code) 218 AN (Authorized Site-Id not scanned - DSV defined code) 219 code) 234 Z3 (In Conformity - Consolidate Transport Item - DSV defined code) 241 code) 242 47 (Delivery scheduled - DSV defined code) 251 48 (Address not complete - DSV defined code) 253 DP (Damaged packaging - DSV defined code) 265 24 (Fixed delivery date - DSV defined code) 269 WA (Wrong address - DSV defined code) 284 49 (Missing document - DSV defined code) 286 NY (Notified to customer - DSV defined code) 288 RC (Refused . Cash on delivery - DSV defined code) 291 code) 292 R (Refused . no reason - DSV defined code) 309 RD (Not delivered . return to depo - DSV defined code) 310 code) 311 NH (Nobody at home - DSV defined code) 330 RP (Refused . no part orders - DSV defined code) 331 RR (Refused . spoiled state - DSV defined code) 338 MP (Missing papers - DSV defined code) 341 50 (Refused . spoiled state - DSV defined code) 771 RK (Refused . no payment COD - DSV defined code) 772 code) 773 51 (Package open - DSV defined code) 3117 Z (In Conformity - DSV defined code) 3157 52 (Claim open - DSV defined code) 5618 53 (Partial missing - DSV defined code) 20241 54 (Destroyed - DSV defined code) 56117 55 (Company closed - DSV defined code) 91001 Z1 (Delivered without signature - DSV defined code) 91002 code) 91004 UR (Undefined reason - DSV defined code) 91005 NY (Notified to customer - DSV defined code) 91006 DP (Damaged packaging - DSV defined code) 91007 M (Missing package - DSV defined code) 91008 X (In transit . external - DSV defined code) 91009 RS (Refused . missing package - DSV defined code) 91010 code) 91011 MP (Missing papers - DSV defined code) 91012 RM (Refused . missing package - DSV defined code) 91013 code) 91014 M (Missing package - DSV defined code) 91015 DY (Dirty - DSV defined code) DIL NZ (Not in conformity - DSV defined code)

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
				others NB (NFL booking not complete - DSV defined code) PRE Z1 NZ (Not in conformity - DSV defined code) Z2 NZ (Not in conformity - DSV defined code) Z3 NZ (Not in conformity - DSV defined code) Z4 WA (Wrong address - DSV defined code) Z5 NZ (Not in conformity - DSV defined code) Z14 R (Refused . no reason - DSV defined code) WA (Wrong address - DSV defined code) NZ (Not in conformity - DSV defined code) SX (Scanning cancelled - DSV defined code) D (Damaged - DSV defined code) BA (Booking accepted - DSV defined code) NZ (Not in conformity - DSV defined code) NY (Notified to customer - DSV defined code) Delivered without signature (DSV defined code) Handled by driver without scanner (DSV defined code) Queue at customer/Congestion (DSV defined code) Authorized site - ID not scanned (DSV defined code) Photo taken (DSV defined code) Damaged packaging (DSV defined code)
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
9012	Status reason description	C an..256	N	

Segment Remarks:**General Notes**

If the message is on shipment level:

The STS segment can be repeated if there are different status reason codes for the goods items on the shipment. The goods item related to the status code should then be presented in connection with the STS that is relevant. As a result, there should not be one STS segment per goods item when the status is on the shipment level. Instead, the goods items should be grouped together under the reported status code.

If the status is on the item/SSCC barcode level:

- There will be one STS segment per item.
- SG14/STS/C601.9015 must be ZGI.

Example:

STS+ZGI+1+63+19+60+7+6'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	75	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				UCN Unique consignment reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+UCN:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	76	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	General Notes Shipment Id assigned from IDS Logistic Network in Germany List of valid codes IDS IDS reference number (CargoLink defined code)
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+IDS:4908600397719007'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	77	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	Air Notes Not used. Sea Notes Not used. Solutions Notes Not used. General Notes ZZA is used for Quality of scanning towards Road application CargoLink. List of valid codes ZZA Quality of scanning (CargoLink defined code)
1154	Reference identifier	C an..70	C an..70	Air Notes Not used. Sea Notes Not used. Solutions Notes Not used.
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+ZZA:61'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	78	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				SID Site ID (DSV defined code)
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+SID:6184430'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	79	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				QLS QLS reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+QLS:00373323995883365533'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	80	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				FF Consignment identifier, freight forwarder assigned
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+FF:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	81	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				AAS Transport contract document identifier
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AAS : 7526538793 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	82	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	General Notes AAM is used in Norwegian traffic and contains Norwegian waybill number. List of valid codes AAM Waybill number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AAM:40257065930729554502'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	83	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				AAO Consignment identifier, consignee assigned
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+AAO:57065930729554502'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	84	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				SRN Shipment reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**General Notes**

SRN is used for GS1 code reference numbers, 17 characters long.

Example:

RFF+SRN:57065930729554502'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	85	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				BH House bill of lading number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+BH:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	86	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				CU Consignment identifier, consignor assigned
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+CU:ORDER123'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	87	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				MB Master bill of lading number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+MB:FLNAT-05053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	88	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				EXT Customer reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+EXT:ORDER567'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	89	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				XRI XRI Profilename (DSV defined code)
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+XRI:CLST'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	90	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	
				List of valid codes
				ZZZ Mutually defined reference number
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	N	
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**Example:**

RFF+ZZZ:157065930729'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0560	91	RFF	C	999	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	List of valid codes ABT Goods declaration document identifier, Customs
1154	Reference identifier	C an..70	C an..70	
1156	Document line identifier	C an..6	C an..6	General Notes SG14 RFF.C506/1156 should be used when SG14 RFF.C506/1153= "ABT" to identify the type of CustomsEntryNumber. Mainly used for Air&Sea business.
				List of valid codes PMT Permit number CER Certificate AT ATA Carnet TS Transhipment
1056	Version identifier	C an..9	N	
1060	Revision identifier	C an..6	N	

Segment Remarks:**General Notes**

SG14 RFF+ABT should be used for CustomsEntryNumber for Air&Sea shipment statuses, in combination with type of CustomsEntryNumber as Identifier in SG14 RFF/C506.1156. Document issue date should be used in SG14 DTM+137. Mainly used for Air&Sea business.

ex:

RFF+ABT:Permittest123:PMT'
 DTM+137:202006241230:203'

Example:

RFF+ABT:123456789:PMT'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0570	92	DTM	C	9	3	Date/time/period

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	List of valid codes 334 Status change date/time 137 Document issue date time
2380	Date or time or period text	C an..35	C an..35	
2379	Date or time or period format code	C an..3	C an..3	General Notes Possible to use either qualifier "203" or "204" List of valid codes 203 CCYYMMDDHHMM 204 CCYYMMDDHHMMSS

Segment Remarks:**General Notes**

DTM+334 to be used for Status date.

DTM+137 to be used for Document issue date time when RFF+ABT is used for "CustomsEntryNumber".

Example:

DTM+334:201610211200:203'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	93	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	
				List of valid codes
				AAI General information
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+AAI+++Remarks:for:the:status:scanning'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	94	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	List of valid codes AHN Status details
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	C an..512	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+AHN+++Status:information:from:the:scanning'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	95	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	Road Notes FTX+ZEL is a DSV specific qualifier to identify status eventcode from IDS.
				List of valid codes ZEL Status eventcode IDS
4453	Free text function code	C an..3	N	
C107	Text reference	C	N	
4441	Free text description code	M an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	C an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZEL+++IDS:ID27'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0590	96	FTX	C	9	3	Free text

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject code qualifier	M an..3	M an..3	General Notes For EventParam use ZEP List of valid codes ZEP EventParam
4453	Free text function code	C an..3	N	
C107	Text reference	C	C	
4441	Free text description code	M an..17	R an..17	General Notes Required to use 4441 when ZEP is used in 4451.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C108	Text literal	C	C	
4440	Free text	M an..512	M an..512	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
4440	Free text	C an..512	N	
3453	Language name code	C an..3	N	
4447	Free text format code	C an..3	N	

Segment Remarks:**Example:**

FTX+ZEP++Location+CATOR'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0600		SG15	C	9	3	NAD-SG16
0610	97	NAD	M	1	3	Name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	List of valid codes AP Accepting party
C082	Party identification details	C	N	
3039	Party identifier	M an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
C058	Name and address	C	N	
3124	Name and address description	M an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
3124	Name and address description	C an..35	N	
C080	Party name	C	N	
3036	Party name	M an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3036	Party name	C an..70	N	
3045	Party name format code	C an..3	N	
C059	Street	C	N	
3042	Street and number or post office box identifier	M an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3042	Street and number or post office box identifier	C an..35	N	
3164	City name	C an..35	N	
C819	Country subdivision details	C	N	
3229	Country subdivision identifier	C an..9	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3228	Country subdivision name	C an..70	N	
3251	Postal identification code	C an..17	N	
3207	Country identifier	C an..3	N	

Segment Remarks:**Example:**

NAD+AP¹

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0620		SG16	C	9	4	CTA-COM
0630	98	CTA	M	1	4	Contact information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function code	C an..3	C an..3	List of valid codes GR Goods receiving contact
C056	Contact details	C	C	
3413	Contact identifier	C an..17	N	General Notes Name of Goods receiving contact (Accepting party)
3412	Contact name	C an..256	C an..256	

Segment Remarks:**Example:**

CTA+GR+:Mr Blue'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0620		SG16	C	9	4	CTA-COM
0640	99	COM	C	9	5	Communication contact

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
COM				
C076	Communication contact	M	M	
3148	Communication address identifier	M an..512	M an..512	
3155	Communication means type code	M an..3	M an..3	
				List of valid codes
				TE Telephone

Segment Remarks:**Road Notes**

Not used towards Road application.

Example:

COM+010-11223344:TE'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	100	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	General Notes All qualifiers except "89", "138" and "ZEL" will be handled as Place of Status Location. List of valid codes 89 Place of registration
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	General Notes Site ID
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	C an..256	General Notes Use name of location or UN locode.
C519	Related location one identification	C	C	
3223	First related location identifier	C an..35	C an..35	General Notes GPS Longitude coordinates
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	C	
3233	Second related location identifier	C an..35	C an..35	General Notes GPS Latitude coordinates
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**General Notes**

Place of registration, if LOC 3227 is 89 and LOC C519.3223 is used then this should be GPS Longitude coordinates. If LOC 3227 is 89 and LOC C553.3233 is used, then this should be GPS Latitude coordinates.

Example:

LOC+89+6184430:::MSDK+12.4609433333333+55.68391'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	101	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	
				List of valid codes 138 Weighting place
C517	Location identification	C	C	
3225	Location identifier	C an..35	C an..35	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	C an..256	General Notes Use name of location or UN locode.
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	
5479	Relation code	C an..3	N	

Segment Remarks:**General Notes**

LOC+138 should be used for Weighting place. If LOC+138 is used then MEA SG24 & DIM SG25 should be used as well.

Example:

LOC+138+2640:::CPH'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0540		SG14	M	99	2	STS-RFF-DTM-FTX-SG15-LOC-SG17-SG23
0650	102	LOC	C	1	3	Place/location identification

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	Road Notes LOC+ZEL is a DSV specific qualifier to identify status location from IDS. List of valid codes ZEL Status Location for IDS
C517	Location identification	C	C	General Notes Use Code for IDS Location
3225	Location identifier	C an..35	C an..35	
1131	Code list identification code	C an..17	N	General Notes Use name of IDS Location
3055	Code list responsible agency code	C an..3	N	
3224	Location name	C an..256	C an..256	General Notes Use name of IDS Location
C519	Related location one identification	C	N	
3223	First related location identifier	C an..35	N	General Notes Use name of IDS Location
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	General Notes Use name of IDS Location
3222	First related location name	C an..70	N	
C553	Related location two identification	C	N	General Notes Use name of IDS Location
3233	Second related location identifier	C an..35	N	
1131	Code list identification code	C an..17	N	General Notes Use name of IDS Location
3055	Code list responsible agency code	C an..3	N	
3232	Second related location name	C an..70	N	General Notes Use name of IDS Location
5479	Relation code	C an..3	N	

Segment Remarks:**Example:**

LOC+ZEL+326:::HAM'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	103	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	List of valid codes 1 Maritime transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Sea Notes**

This is a required segment for status messages for sea shipments.

Example:

TDT+20++1 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	104	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	List of valid codes 3 Road transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Road Notes**

This is a required segment for status messages for road shipments.

Example:

TDT+20++3 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0670		SG17	C	99	3	TDT
0680	105	TDT	M	1	3	Transport information

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
TDT				
8051	Transport stage code qualifier	M an..3	M an..3	List of valid codes 20 Main-carriage transport
8028	Means of transport journey identifier	C an..17	N	
C220	Mode of transport	C	C	
8067	Transport mode name code	C an..3	C an..3	List of valid codes 4 Air transport
8066	Transport mode name	C an..17	N	
C001	Transport means	C	N	
8179	Transport means description code	C an..8	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8178	Transport means description	C an..17	N	
C040	Carrier	C	N	
3127	Carrier identifier	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
3126	Carrier name	C an..35	N	
8101	Transit direction indicator code	C an..3	N	
C401	Excess transportation information	C	N	
8457	Excess transportation reason code	M an..3	N	
8459	Excess transportation responsibility code	M an..3	N	
7130	Customer shipment authorisation identifier	C an..17	N	
C222	Transport identification	C	N	
8213	Transport means identification name identifier	C an..35	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
8212	Transport means identification name	C an..70	N	
8453	Transport means nationality code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
8281	Transport means ownership indicator code	C an..3	N	

Segment Remarks:**Air Notes**

This is a required segment for status messages for air shipments.

Example:

TDT+20++4 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
0910		SG23	C	99	3	GID-SG24-SG25-SG26
0920	106	GID	M	1	3	Goods item details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GID				
1496	Goods item number	C an..6	C an..6	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	
C213	Number and type of packages	C	N	
7224	Package quantity	C n..8	N	
7065	Package type description code	C an..17	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7064	Type of packages	C an..35	N	
7233	Packaging related description code	C an..3	N	

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
	code			

Segment Remarks:**Example:**

GID+1 '

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	107	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes WT Weights
C502	Measurement details	C	C	
6313	Measured attribute code	C an..3	C an..3	List of valid codes AAB Goods item gross weight
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes KGM kilogram
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+WT+AAB+KGM:100'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	108	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes WT Weights
C502	Measurement details	C	C	
6313	Measured attribute code	C an..3	C an..3	List of valid codes ADZ Declared net weight
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes KGM kilogram
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+WT+ADZ+KGM: 90 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	109	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes VOL Volume
C502	Measurement details	C	N	
6313	Measured attribute code	C an..3	N	General Notes Not used for volume
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes MTQ cubic metre
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+VOL++MTQ:2.0'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1000		SG24	C	99	4	MEA
1010	110	MEA	M	1	4	Measurements

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
MEA				
6311	Measurement purpose code qualifier	M an..3	M an..3	List of valid codes LMT Loading meters
C502	Measurement details	C	N	
6313	Measured attribute code	C an..3	N	General Notes Not used for loading meters
6321	Measurement significance code	C an..3	N	
6155	Non-discrete measurement name code	C an..17	N	
6154	Non-discrete measurement name	C an..70	N	
C174	Value/range	C	C	
6411	Measurement unit code	M an..8	M an..8	List of valid codes MTR metre
6314	Measure	C an..18	C an..18	
6162	Range minimum quantity	C n..18	N	
6152	Range maximum quantity	C n..18	N	
6432	Significant digits quantity	C n..2	N	
7383	Surface or layer code	C an..3	N	

Segment Remarks:**Example:**

MEA+LMT++MTR:2.4'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1030		SG25	C	99	4	DIM
1040	111	DIM	M	1	4	DIMENSIONS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DIM				
6145	Dimension type code qualifier	M an..3	M an..3	
C211	Dimensions	M	M	
6411	Measurement unit code	M an..8	M an..8	General Notes Qualifier "CMT" or "MTR" can be used. List of valid codes MTR metre CMT centimetre
6168	Length measure	C n..15	C n..15	
6140	Width measure	C n..15	C n..15	
6008	Height measure	C n..15	C n..15	

Segment Remarks:**Example:**

DIM+1+MTR:1:2:3'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
General Notes The dimension value is always in Meter.						
1070	112	PCI	M	1	4	PACKAGE IDENTIFICATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PCI				
4233	Marking instructions code	C an..3	C an..3	List of valid codes 17 Seller's instructions
C210	Marks & labels	C	N	
7102	Shipping marks description	M an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
8169	Full or empty indicator code	C an..3	N	
C827	Type of marking	C	N	
7511	Marking type code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	

Segment Remarks:**Example:**

PCI+17'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
General Notes The dimension value is always in Meter.						
1080	113	GIN	C	9999	5	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Object identification code qualifier	M an..3	M an..3	List of valid codes BN Serial number
C208	Identity number range	M	M	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	

Segment Remarks:**Example:**

GIN+BN+3298415480:35710532112+21141281:21158364+21158384:21158344+21158324:21158304+21158384:21158314'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
1070	114	PCI	M	1	4	PACKAGE IDENTIFICATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PCI				
4233	Marking instructions code	C an..3	C an..3	List of valid codes 18 Carrier's instructions
C210	Marks & labels	C	N	
7102	Shipping marks description	M an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
7102	Shipping marks description	C an..35	N	
8169	Full or empty indicator code	C an..3	N	
C827	Type of marking	C	N	
7511	Marking type code	M an..3	N	
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	

Segment Remarks:**Example:**

PCI+18'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1060		SG26	C	99	4	PCI-GIN
1080	115	GIN	C	9999	5	Goods identity number

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIN				
7405	Object identification code qualifier	M an..3	M an..3	
				List of valid codes
				AW Serial shipping container code
C208	Identity number range	M	M	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	
C208	Identity number range	C	C	
7402	Object identifier	M an..35	M an..35	
7402	Object identifier	C an..35	C an..35	

Segment Remarks:**Example:**

GIN+AW+357065933298415480:357105321121122136+357105321121141281:357105321121158364+357105321121158384:357105321121158344+357105321121158324:357105321121158304+357105321121158384:357105321121158314

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
1120	116	UNT	M	1	0	Message trailer

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNT				
0074	Number of segments in a message	M n..10	M n..10	
0062	Message reference number	M an..14	M an..14	

Segment Remarks:**Example:**

UNT+115+123456789'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used



Counter	No	Tag	St	MaxOcc	Level	Name
---------	----	-----	----	--------	-------	------

0000	117	UNZ	M	1	0	Interchange trailer
------	-----	------------	---	---	---	---------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNZ				
0036	Interchange control count	M n..6	M n..6	General Notes Total number of documents in the interchange.
0020	Interchange control reference	M an..14	M an..14	General Notes Same interchange control reference as is found in UNB.

Segment Remarks:**Example:**

UNZ+1+859532 '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used



Example Message

No	Tag	Example
01	UNB	UNB+UNOC:4+5912345678901:14+5790000110018:14+20151007:1147+859532++++ ++1' INTERCHANGE HEADER
02	UNH	UNH+123456789+IFTSTA:D:10B:UN'
03	BGM	BGM+77+DKSER-12345+9'
04	DTM	DTM+137:201702101200:203'
05	TSR	TSR++3+3'
SG1		
06	NAD	NAD+DR+5703459::91'
SG2		
07	CTA	CTA+IC+:Driver name'
08	COM	COM+010-410998833:TE'
09	COM	COM+contact@name.com:EM'
10	COM	COM+010-480229933:AL'
SG1		
11	NAD	NAD+HA+2014714::87'
SG2		
12	CTA	CTA+ZHA+:Haulier name'
13	COM	COM+010-410998833:TE'
14	COM	COM+contact@name.com:EM'
15	COM	COM+010-480229933:AL'
SG1		
16	NAD	NAD+ZDE+2014714::91'
SG2		
17	CTA	CTA+ZDE+:Mr Green'
18	COM	COM+010-410998833:TE'
19	COM	COM+contact@name.com:EM'
20	COM	COM+010-480229933:AL'
SG1		
21	NAD	NAD+ZPL+2125020::9'
SG2		
22	CTA	CTA+ZPL+:Mr Green'
23	COM	COM+010-410998833:TE'
24	COM	COM+contact@name.com:EM'
25	COM	COM+010-480229933:AL'

No = Consecutive segment number



No	Tag	Example
SG3		
26	RFF	RFF+VT:VY91262:DK'
27	DTM	DTM+145:201703071200:203'
SG3		
28	RFF	RFF+AFB:FLUGNX-0392'
SG3		
29	RFF	RFF+ALL:170307'
30	LOC	LOC+193+DK:162'
SG13		
31	CNI	CNI+1+00370716487163671311::MasterBill::X'
SG14		
32	STS	STS+ZCN:Container+1::Arrival+5+6+8+62+30'
33	RFF	RFF+UCN:FLNAT-05053'
34	RFF	RFF+IDS:4908600397719007'
35	RFF	RFF+ZZA:61'
36	RFF	RFF+SID:6184430'
37	RFF	RFF+QLS:00373323995883365533'
38	RFF	RFF+FF:FLNAT-05053'
39	RFF	RFF+AAS:7526538793'
40	RFF	RFF+AAM:40257065930729554502'
41	RFF	RFF+AAO:57065930729554502'
42	RFF	RFF+SRN:57065930729554502'
43	RFF	RFF+BH:FLNAT-05053'
44	RFF	RFF+CU:ORDER123'
45	RFF	RFF+MB:FLNAT-05053'
46	RFF	RFF+ABT:123456789:PMT'
47	DTM	DTM+334:201610211200:203'
48	FTX	FTX+AAI+++Remarks:for:the:status:scanning'
49	FTX	FTX+AHN+++Status:information:from:the:scanning'
50	FTX	FTX+ZEL+++IDS:ID27'
51	FTX	FTX+ACD+++Status Reason'
52	FTX	FTX+ZEP++Location+CATOR'
SG15		
53	NAD	NAD+AP'
SG16		
54	CTA	CTA+GR+:Mr Blue'

No = Consecutive segment number



No	Tag	Example
55	COM	COM+010-11223344:TE'
56	LOC	LOC+89+6184430::MSDK+12.4609433333333+55.68391'
57	LOC	LOC+138+2640::CPH'
58	LOC	LOC+ZEL+326::HAM'
59	LOC	LOC+Z01+DEHAM::Hamburg'
	SG17	
60	TDT	TDT+20++1'
	SG17	
61	TDT	TDT+20++3'
	SG17	
62	TDT	TDT+20++4'
	SG23	
63	GID	GID+1'
	SG24	
64	MEA	MEA+WT+AAB+KGM:100'
	SG24	
65	MEA	MEA+WT+ADZ+KGM:90'
	SG24	
66	MEA	MEA+VOL++MTQ:2.0'
	SG24	
67	MEA	MEA+LMT++MTR:2.4'
	SG25	
68	DIM	DIM+1+MTR:1:2:3' DIMENSIONS
	SG26	
69	PCI	PCI+17' PACKAGE IDENTIFICATION
70	GIN	GIN+BN+3298415480:35710532112+21141281:21158364+21158384:21158344+21158324:21158304+21158384:21158314'
	SG26	
71	PCI	PCI+18' PACKAGE IDENTIFICATION
72	GIN	GIN+AW+357065933298415480:3571053211211221122136+357105321121141281:357105321121158364+357105321121158384:357105321121158344+357105321121158324:357105321121158304+357105321121158384:357105321121158314'
	SG13	
73	CNI	CNI+0+00370716487163671311'
	SG14	

No = Consecutive segment number



No	Tag	Example
74	STS	STS+ZGI+1+63+19+60+7+6'
75	RFF	RFF+UCN:FLNAT-05053'
76	RFF	RFF+IDS:4908600397719007'
77	RFF	RFF+ZZA:61'
78	RFF	RFF+SID:6184430'
79	RFF	RFF+QLS:00373323995883365533'
80	RFF	RFF+FF:FLNAT-05053'
81	RFF	RFF+AAS:7526538793'
82	RFF	RFF+AAM:40257065930729554502'
83	RFF	RFF+AAO:57065930729554502'
84	RFF	RFF+SRN:57065930729554502'
85	RFF	RFF+BH:FLNAT-05053'
86	RFF	RFF+CU:ORDER123'
87	RFF	RFF+MB:FLNAT-05053'
88	RFF	RFF+EXT:ORDER567'
89	RFF	RFF+XRI:CLST'
90	RFF	RFF+ZZZ:157065930729'
91	RFF	RFF+ABT:123456789:PMT'
92	DTM	DTM+334:201610211200:203'
93	FTX	FTX+AAI+++Remarks:for:the:status:scanning'
94	FTX	FTX+AHN+++Status:information:from:the:scanning'
95	FTX	FTX+ZEL+++IDS:ID27'
96	FTX	FTX+ZEP++Location+CATOR'
SG15		
97	NAD	NAD+AP'
SG16		
98	CTA	CTA+GR+:Mr Blue'
99	COM	COM+010-11223344:TE'
100	LOC	LOC+89+6184430::MSDK+12.4609433333333+55.68391'
101	LOC	LOC+138+2640::CPH'
102	LOC	LOC+ZEL+326::HAM'
SG17		
103	TDT	TDT+20++1'
SG17		
104	TDT	TDT+20++3'
SG17		

No = Consecutive segment number



No	Tag	Example
105	TDT	TDT+20++4'
	SG23	
106	GID	GID+1'
	SG24	
107	MEA	MEA+WT+AAB+KGM:100'
	SG24	
108	MEA	MEA+WT+ADZ+KGM:90'
	SG24	
109	MEA	MEA+VOL++MTQ:2.0'
	SG24	
110	MEA	MEA+LMT++MTR:2.4'
	SG25	
111	DIM	DIM+1+MTR:1:2:3'
		DIMENSIONS
	SG26	
112	PCI	PCI+17'
		PACKAGE IDENTIFICATION
113	GIN	GIN+BN+3298415480:35710532112+21141281:21158364+21158384:21158344+21158324:21158304+21158384:21158314'
	SG26	
114	PCI	PCI+18'
		PACKAGE IDENTIFICATION
115	GIN	GIN+AW+357065933298415480:357105321121122136+357105321121141281:357105321121158364+357105321121158384:357105321121158344+357105321121158324:357105321121158304+357105321121158384:357105321121158314'
116	UNT	UNT+115+123456789'
117	UNZ	UNZ+1+859532'

No = Consecutive segment number